



Drilling Fluids, Inc.

DESCRIPTION

USES

BENEFITS

TREATMENT

TYPICAL PHYSICAL PROPERTIES

SAFE HANDLING RECOMMENDATIONS

POTASSIUM CHLORIDE

POTASSIUM CHLORIDE [KCl] is also known as Potash or Muriate of Potash. The product combines potassium [K+] and chlorides [Cl-].

POTASSIUM CHLORIDE provides potassium ions to inhibit shale [clay] swelling and dispersion. **POTASSIUM CHLORIDE** is used to drill troublesome “gumbo” shales and “dirty” sands. In producing sands the potassium ion prevents the swelling of clays, which might inhibit production of hydrocarbons. **POTASSIUM CHLORIDE** is a very economical source of potassium ions.

POTASSIUM CHLORIDE is used to obtain the potassium ion level needed to maximize the integrity of drill cuttings and to maintain borehole stability. 2% to 6% by weight are commonly used concentrations for drillin and completion activities. When combined with SALT [sodium chloride or NaCl] for higher densities, it is important to monitor the potassium level to insure that there is twice as much K+ as Na+. This 2 to 1 ratio preserves the inhibitive properties of the potassium ion. An ion meter or Atomic Adsorption Unit is required to determine the relative concentration of K+ and Na+.

POTASSIUM CHLORIDE is readably soluble and can be added through the mud hopper or if necessary directly to a well agitated drilling fluid system. Drilling conditions and system requirements will determine concentration needed. It is suggested that the potassium level be monitored by approved test methods, including the specific ion electrode technique, in order to determine the daily treatment levels to follow. Concentrations of potassium and chlorides should be compared to a Chlorides Chart. Mixing high concentrations of **POTASSIUM CHLORIDE** requires a smaller starting volume of water. Refer to GEO Drilling Fluids Chlorides Chart.

Appearance.....white to reddish brown crystals or granular
Hygroscopic.....yes
Specific gravity.....1.98
Solubility in water.....24%

Utilize normal precautions for employee protection when handling chemical products. Use of appropriate respirator, gloves, goggles, and an apron is recommended for employee comfort and protection. See Material Safety Data Sheet [MSDS] for this product prior to use.

GEO Drilling Fluids, Inc.

1431 Union Avenue
Bakersfield, CA 93305


1-800-GETSGEO

[661]325-5919

geodf@geodf.com

For more info visit:

geodf.com

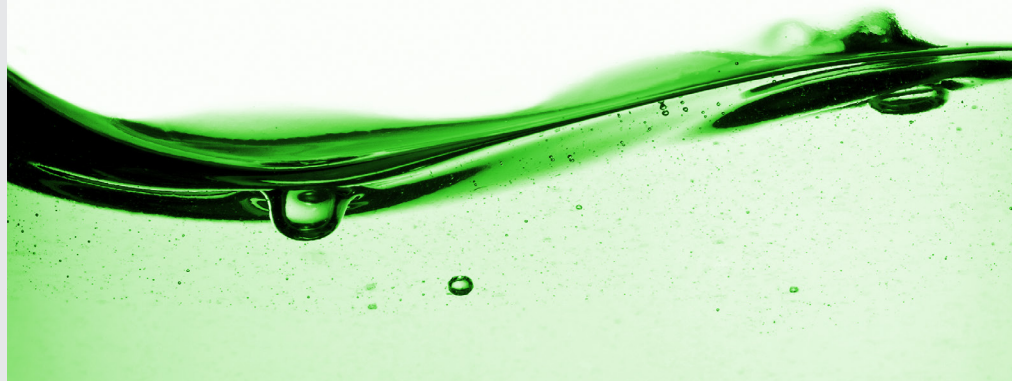



Drilling Fluids, Inc.

POTASSIUM CHLORIDE

PACKAGING

POTASSIUM CHLORIDE is packaged in 50 pound multi-wall bags.

DATA FOR POTASSIUM CHLORIDE SOLUTION						
KCl Concentration (% by weight)	Density (ppg)	KCl per finished barrel (ppb)	Percent Volume to Start	Cl- (mg/l)	K+ (mg/l)	KCl (Mg/l)
1%	8.39	3.50	99.46%	4,786	5,278	10,064
2%	8.44	7.07	99.08%	9,608	10,596	20,203
3%	8.50	10.67	98.69%	14,500	15,991	30,491
4%	8.55	14.35	98.29%	19,464	21,465	40,928
5%	8.60	18.03	97.88%	24,498	27,017	51,515
6%	8.66	21.77	97.47%	29,603	32,647	62,250
7%	8.71	25.55	97.04%	34,744	38,316	73,060
8%	8.77	29.40	96.60%	39,955	44,064	84,019
9%	8.82	33.29	96.16%	45,238	49,889	95,127
10%	8.88	37.21	95.70%	50,556	55,754	106,310
12%	8.99	45.23	94.76%	61,440	67,757	129,197
14%	9.11	53.46	93.78%	72,607	80,073	152,680
16%	9.22	61.86	92.77%	84,023	92,663	176,686
18%	9.34	70.47	91.71%	95,758	105,605	201,362
20%	9.46	79.33	90.62%	107,741	118,820	226,560
24%	9.70	97.63	88.33%	120,043	132,387	252,430

GEO Drilling Fluids, Inc.

1431 Union Avenue
Bakersfield, CA 93305

1-800-GETSGEO

[661]325-5919

geodf@geodf.com

For more info visit:

geodf.com

